

eCONO Range Shelters



eCONO PENT RANGE SHELTER SPECIFICATION 12ft Deep Units- No Canopy Overhang

Unit Size

eCONO PENT shelters 3.6m x 3.6m (12ft x 12ft), 4.8m x 3.6m (16ft x 12ft) & 7.2m x 3.6m (24ft x 12ft)

Wall Construction

Walls are built with nominal 75mm x 50mm CLS timber framing, spaced at 600mm centres.

Wall Cladding

Rebated Redwood ex 16x125mm shiplap

Roof Construction

Purlins are 100mm x 47mm regularised timber spaced at 400mm centres. The roof covering is black Onduline corrugated sheets.

Door Openings

Opening sizes- 12ft wide shelter -1 x 2.4m , 16ft wide shelter - 2 x 1.8m, 24ft wide shelter- 2 x 2.4m. Height of opening 2.2m.

Kickboards

Available as an optional extra. Recommended if mobile unit.

Ventilation

The open front & eave construction provides adequate ventilation.

Canopy/Overhang

None

Guttering

Available as an optional extra

Height

2.4m to the front and 2.27m to the back.


Barge Boards

Fitted to each side of the building- 18mm x145mm prepared smooth timbers

Timber Treatment

All timber used in the construction of this building is pressure treated to BS EN 3351-UC3.2


Kickboard lining where supplied or fitted is moisture resistant OSB3

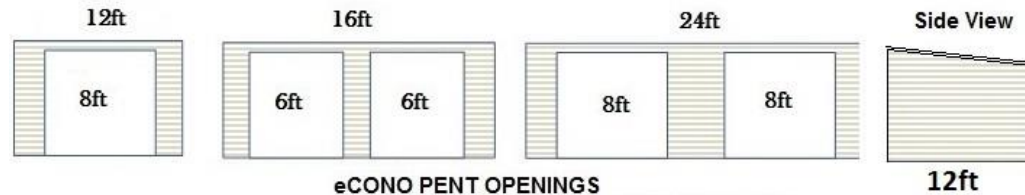

PRICE - eCONO PENT RANGE SHELTERS - 12ft Deep Units- No Canopy Overhang

Prices include VAT, installation in Kent or collected from us- for outside Kent please call for delivery & install prices

	STATIC			MOBILE- timber skids			MOBILE- metal skids		
	12 x 12	16 x 12	24 x 12	12 x 12	16 x 12	24 x 12	12 x 12	16 x 12	24 x 12
Installed inc. VAT	£1,145	£1,460	£1,935	£1,295	£1,660	£2,235	£1,745	£2,260	£2,835
Collected inc. VAT	£1,030	£1,314	£1,742	£1,180	£1,514	£2,042	£1,630	£2,114	£2,642



KICK BOARD LINING - EXTRA

12ft unit	£106	inc. VAT
16ft unit	£123	inc. VAT
24ft unit	£159	inc. VAT



eCONO Mobile Shelter & Stable Skids

Prices include VAT

TIMBER SKIDS MEET THE REQUIREMENT FOR PLANNING CONSENT REGARDS MOBILE BUILDINGS

SUITABLE FOR MOVING SHORTS DISTANCES OVER GOOD TERRAIN ONLY



DESIGN YOUR OWN MOBILE UNIT UP TO 24ft LONG USING OUR MOBILE SKIDS

	Mobile Full Frame Timber Skids	Mobile Full Frame Galvanised Metal Skids
12ft unit	£150	£600
13ft - 18ft unit	£200	£800
19ft-24ft unit	£300	£900

Mobile Shelters

Full frame timber skids meet with the requirements for a mobile building, moving your shelter over short distances only is recommended on timber skids . Avoid sharp turns and move at very low speeds.

Metal skids are more suitable for a fully mobile shelter. Any damage caused when moving your shelter will be your responsibility.



Galvanised metal skid



eCONO APEX RANGE SHELTER SPECIFICATION 10ft Deep Units With 800mm Canopy Overhang

Unit Size

eCONO Apex shelters 3.6m x 3.0m (12ft x 10ft), 4.8m x 3.0m (16ft x 10ft) & 7.2m x 3.0m (24ft x 10ft)

Wall Construction

Walls are built with nominal 75mm x 50mm CLS timber framing, spaced at 600mm centres.

Wall Cladding

Quality rebated Redwood ex 16x125mm shiplap

Roof Construction

Purlins are 100mm x 47mm regularised timber spaced at 400mm centres, supported by a continuous timber support rail. The roof covering is black Onduline corrugated sheets.

Door Openings

Opening sizes- 12ft wide shelter -1 x 2.4m, 16ft wide shelter - 2 x 1.8m, 24ft wide shelter- 2 x 2.4m .Height of opening 2.1m

Kickboards

Available as an optional extra. Recommended if mobile.

Ventilation

The open front & eve construction provides adequate ventilation.

Canopy Overhang

Front overhang extends to 800mm

Guttering

Available as an optional extra

Height

To eaves, measures 2.24m and to ridge 2.85m

Barge Boards

Fitted to each gable end of the building- 18mm x145mm prepared smooth timbers


Corner cover fillets

Cover fillets are fitted to the front and back panel joints to each side panel

Timber Treatment

All timber used in the construction of this building is pressure treated to BS EN 3351-UC3.2

Kickboard lining where supplied or fitted is moisture resistant OSB3

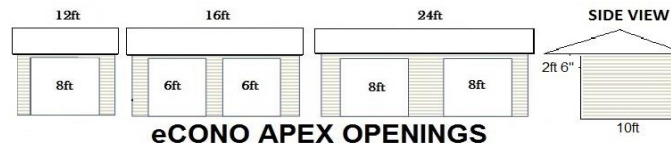


*"Unbeatable value
and quality!"*

PRICE - eCONO APEX RANGE SHELTERS - 10ft Deep Units With 800mm Canopy Overhang

Prices include VAT, installation in Kent or collected from us- for outside Kent please call for delivery & install prices

	STATIC			MOBILE- timber skids			MOBILE- metal skids		
	12 x 10	16 x 10	24 x 10	12 x 10	16 x 10	24 x 10	12 x 10	16 x 10	24 x 10
Installed inc. VAT	£1,200	£1,600	£2,080	£1,350	£1,800	£2,380	£1,800	£2,400	£2,980
Collected inc. VAT	£1,080	£1,440	£1,872	£1,230	£1,640	£2,172	£1,680	£2,240	£2,772



Installed inc. VAT
Collected inc. VAT

KICK BOARD LINING - EXTRA			
12ft unit	£106	inc. VAT	
16ft unit	£123	inc. VAT	
24ft unit	£159	inc. VAT	



Kick board lining is recommended for all mobile units.



eCONO APEX PLUS RANGE SHELTER SPECIFICATION 12ft Deep Units With 1200mm Canopy Overhang

Unit Size

eCONO APEX PLUS shelters 3.6m x 3.6m (12ft x 12ft), 4.8m x 3.6m (16ft x 12ft) & 7.2m x 3.6m (24ft x 12ft)

Wall Construction

Walls are built with nominal 75mm x 50mm CLS timber framing, spaced at 600mm centres.

Wall Cladding

Quality rebated Redwood ex 16x125mm shiplap

Roof Construction

Purlins are 100mm x 47mm regularised timber spaced at 400mm centres, supported by a continuous timber support rail. The roof covering is black Onduline corrugated sheets.

Door Openings

Opening sizes- 12ft wide shelter - 1 x 2.4m, 16ft wide shelter - 2 x 1.8m, 24ft wide shelter - 2 x 2.4m. Height of opening 2.1m

Kickboards

11mm OSB3 boarded to 4ft high.

Ventilation

The open front & eave construction provides adequate ventilation.

Canopy Overhang

Front overhang extends to 1.2m

Guttering

Available as an optional extra

Height

To eaves, measures 2.24m and to ridge 3.0m

Barge Boards


Fitted to each gable end of the building- 18mm x145mm prepared smooth timbers

Corner cover fillets

Cover fillets are fitted to the front and back panel joints to each side panel

Timber Treatment

All timber used in the construction of this building is pressure treated to BS EN 3351-UC3.2



'Unbeatable value and quality!'

PRICE - eCONO APEX PLUS RANGE SHELTERS - 12ft Deep Units With 1200mm Canopy Overhang

Prices include VAT, installation in Kent or collected from us- for outside Kent please call for delivery & install prices

	STATIC			MOBILE- timber skids			MOBILE- metal skids		
	12 x 12	16 x 12	24 x 12	12 x 12	16 x 12	24 x 12	12 x 12	16 x 12	24 x 12
Installed inc. VAT	£1,370	£1,780	£2,180	£1,520	£1,980	£2,480	£1,970	£2,580	£3,080
Collected inc. VAT	£1,233	£1,602	£1,962	£1,383	£1,802	£2,262	£1,833	£2,402	£2,862

"Unbeatable value and quality!"

