

CCTV2610 (HUR-230)

2.2 MEGAPIXEL HD-SDI


VARIFOCAL IR BULLET CAMERA



Features

- 2.2 Megapixel 1080p Full HD Panasonic CMOS Sensor
- 3 ~ 10mm Megapixel Varifocal lens
- Up to 1920 x 1080p resolution @ 30fps
- ICR cut filter
- Supports WDR and ACE (Advanced Contrast Enhancement)
- IR range 30m
- Supports DNR and DSS
- Supports Privacy Mask
- Intelligent Motion Detection
- Multi-protocol support through RS-485
- Auto switching IR LED control
- OSD control
- Externally Adjustable focal length and focus
- Cable managed bracket
- BNC output for setup
- IP66 Ingress protection
- 12V DC / 24V AC dual voltage

Dimensions (mm)

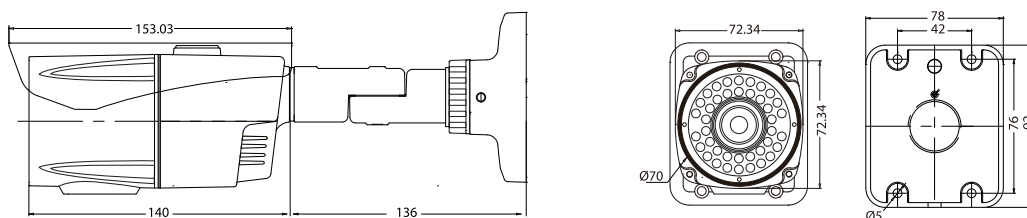

CCTV2610 (HUR-230)

2.2 MEGA PIXEL HD-SDI

VARIFOCAL IR BULLET CAMERA

Specifications

Model No	CCTV2610 (HUR-230)
Image Sensor	1/3" Panasonic CMOS
Total Pixels	2010 (H) × 1108 (V) = 2,227,080 pixel
Active Pixels	1944 (H) × 1092 (V) = 2,122,848 pixel
Scanning System	Progressive
Lens	3 ~ 10mm Varifocal Megapixel
Resolution	Digital: 1920 × 1080p (1080p @ 30fps), 1280 × 720p (720p @ 60fps)
	Analog: 700 TVL
Min. Illumination	Color: 1.0lux, BW: 0.5lux, Color DDS: 0.002lux, BW DDS: 0.001 lux
Video Output	HD-SDI, Analog: NTSC, PAL (without WDR)
S/N Ratio	More than 50dB (AGC off)
Shutter Speed	Auto / manual (1/30(1/25) ~ 1/60000)
DSS	Off / ×2 / ×3 / ×4
WDR / BLC	Off / WDR / BLC
Day & Night	Auto / Day / Night / Ext
Smart IR	Off / On (IR range 30m)
E. Zoom	E.ZOOM
HLC	Off / On
DNR	Off / Low / Middle / High / Auto
Privacy / Motion	Privacy - Off / On (32 points) / Motion - Off / On (4 points)
Defog	Off / On
Communication	ID (1 ~ 255) / Protocol (PELCO-P / PELCO-D / UPDATE)
	BAUDRATE (2400 / 4800 / 9600 / 19200 / 38400 / 57600 / 115200)
Voltage	12V DC ± 10 %
Power Consumption	250 mA
Operating Temperature	-10 ~ +50 (Humidity: 0 % RH ~ 80 % RH)

Specifications are subject to change without prior notice